



BLACKBERRY RADAR H2M IS
ITH100 – 1
September 2023

Chassis

Installation Guide

Table of contents

1	Overview	3
2	Safety and Product Information	4
3	Get ready for installation.....	11
4	Installing BlackBerry Radar H2M IS modules.....	12
4.1	Prepare to install.....	12
4.2	Installation tools	15
4.3	Matching a module identifier to an asset identifier	16
4.4	Module installation.....	19
4.4.1	Chassis installation procedure	20
4.4.2	Resetting BlackBerry Radar H2M IS modules	27
5	Cleaning BlackBerry Radar H2M IS modules.....	28
6	Removing BlackBerry Radar H2M IS modules.....	29
6.1	Removal tools	29
6.2	Module removal	30
6.3	Shipment prep	31
7	Support	33
	Legal notice.....	34

1 Overview

This guide provides detailed instructions for installing and activating new BlackBerry Radar H2M IS modules. It includes three main tasks:

Task 1: Get ready for installation (see Section 2)

Task 2: Install a BlackBerry Radar H2M IS module (see Section 3)

- Match the module identifier with the asset identifier on the installation worksheet.
- Install the module onto the asset.

Task 3: Uninstall a module (see Section 6)

- Remove the module from the asset.
- Prepare the device for shipping.
- Device removal.

Complete BlackBerry Radar documentation is available online when you log in to BlackBerry Radar Dashboard. For instructions on how to configure the BlackBerry Radar Dashboard or how to activate newly installed devices, see the online documentation.

2 Safety and Product Information











Before you start using the BlackBerry Radar H2M IS™ device (herein after referred to as device), review the safety and regulatory information provided in this document. Keep this document in a safe place so that you can refer to it whenever you need it.

In some countries there may be restrictions on using wireless devices with encryption software. Check with your local authorities for the restrictions in your area.

To find the latest safety and product information, visit:

docs.radar.blackberry.com/guides/user_guide_safety

Important safety precautions

	Do not use the device or magnet near medical devices, including pacemakers and hearing aids, because they might malfunction and cause serious harm or death to you or others.
	Do not dispose of the device, in a fire because this might cause an explosion resulting in serious injury, death, or property loss.
	Do not attempt to install the device or open the device when an explosive atmosphere is present.
	The device is designed to be operated in temperatures between -40 and 85°C (-40 and 185°F). Store device in temperatures between 10 and 30°C (14 and 86°F) and 0-50% humidity. Do not expose the device to temperatures above 100°C (212°F). Use of the device outside of the recommended temperature range could cause damage to the device or lithium-metal battery.
	Do not submerge the device in water.
	Do not puncture, crush, or expose battery to severe physical shock. Do not attempt to disassemble battery pack. Do not short-circuit the battery or allow metallic or conductive objects to contact the battery terminals.
	Under certain extreme circumstances, the non-metallic parts incorporated in the enclosure of this equipment may generate an ignition-capable level of electrostatic charge. Therefore, the equipment shall not be installed in a location where the external conditions are conducive to the build-up of electrostatic charge on such surfaces. In addition, the equipment shall only be cleaned with a damp cloth.
	Exposure to some chemicals may degrade the sealing properties of materials used in the device. Avoid exposing your device to these chemicals.
	This equipment is not suitable for use in locations where children are likely to be present.
	Keep device magnets away from small children. Potential choking hazard.

Product information: BlackBerry Radar H2M IS ITH100-1

Intrinsic safety warnings

Warning markings
WARNING—DO NOT OPEN WHEN AN EXPLOSIVE ATMOSPHERE IS PRESENT
WARNING—POTENTIAL ELECTROSTATIC CHARGING HAZARD—SEE INSTRUCTIONS
WARNING – DO NOT REMOVE OR REPLACE WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE FREE OF IGNITABLE CONCENTRATIONS OF FLAMMABLE GASES OR VAPORS

Mechanical properties:

Weight: Approximately 1069 g (37.7 oz.)

Size: (L x W x H): 314 x 97 x 43.5 mm (12.4 x 3.8 x 1.7 in.)

Electrical Rating / Battery specifications:

Battery operated device

Non-rechargeable lithium-metal battery, Non-user replaceable

7.2V, 38Ah nominal

Environmental properties:

Enclosure Type: IP67/IP69K

Operating Temperature Range: -40 to 85°C (-40 to 185°F)

IECEX/ATEX/cETLus Temperature Range: -40 to 70°C (-40 to 158°F)

Hazardous locations

Hazardous location markings		
IECEX	ATEX	cETLus
Ex ia IIC T4 Ga	CE 2903	Class I, Division 1, Groups A, B, C, D ; T4
Ex ia IIIC T135°C Da	Ex II 1GD	Class I, Division 2, Groups A, B, C, D ; T4
	Ex ia IIC T4 Ga	Class II, Division 1, Groups E, F, G ; T4
	Ex ia IIIC T135°C Da	Class I, Zone 0, AEx ia IIC T4 Ga
		Zone 20, AEx ia IIIC T135°C Da
		Ex ia IIC T4 Ga
		Ex ia IIIC T135°C Da

Relevant standards

Standards	
IECEX	Subject
IEC 60079-0:2017 Ed. 7	Part 0: Equipment – General requirements
IEC 60079-11:2011 Ed. 6	Part 11: Equipment protection by intrinsic safety "i"
ATEX	
EN IEC 60079-0:2018	Part 0: Equipment – General requirements
EN 60079-11:2012	Part 11: Equipment protection by intrinsic safety "i"
cETLus	
CSA C22.2 No. 60079-0:2019 UL 60079-0:2019	Part 0: Equipment – General requirements
CSA C22.2 No. 60079-11:2014 CSA C22.2 No. 60079-11:2013	Part 11: Equipment protection by intrinsic safety "i"
UL 913- 8 th Edition ANSI/ISA–12.12.01–2000	Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II, and III, Division 1, Hazardous (Classified) Locations

Radio specifications:

Radio specification	MAX radio conducted power information (EIRP):
LTE B1: 1920~1980 MHz	LTE B1: 26.90 dBm
LTE B2: 1850~1910 MHz	LTE B2: 26.63 dBm
LTE B3: 1710~1785 MHz	LTE B3: 27.20 dBm
LTE B4: 1710~1755 MHz	LTE B4: 26.06 dBm
LTE B5: 824~849 MHz	LTE B5: 25.39 dBm
LTE B8: 880~915 MHz	LTE B8: 24.80 dBm
LTE B12: 698~716 MHz	LTE B12: 22.72 dBm
LTE B13: 777~787 MHz	LTE B13: 23.97 dBm
LTE B20: 832~862 MHz	LTE B20: 24.92 dBm
LTE B25: 1850~1915 MHz	LTE B25: 26.29 dBm
LTE B26: 814~849 MHz	LTE B26: 22.84 dBm
LTE B28: 703~748 MHz	LTE B26: 23.93 dBm
LTE B66: 1710~1780 MHz	LTE B66: 27.40 dBm
LTE B85: 698~716 MHz	LTE B85: 23.97 dBm
869.85 MHz	869.85 MHz: 9.04 dBm
915 MHz: 902~928 MHz	915 MHz: 18.97 dBm
2.4 GHz: 2405~2480 MHz	2.4 GHz: 16.55 dBm

Bands for FCC/ISED include: B2/B4/B5/B12/B13/B25/B26/B66/B85.
869.85 MHz will be used for CE frequency band and 915 MHz will be used for FCC and ISED frequency band.

Operating temperature and humidity

The BlackBerry Radar H2M IS device is designed for the following temperature and humidity ranges:

Operation:	Storage:
Temperature: (-40 to 85°C) -40 to 185°F	Temperature: -10 to 30°C (14 to 86°F)
Humidity: 0-100%	Humidity: 0-50%

Battery safety

The device contains a non-rechargeable, Lithium Metal battery. Do not attempt to recharge the battery.

To preserve the Intrinsic Safety of the device, the battery is not user replaceable. If your device requires a battery replacement, please contact your BlackBerry representative to coordinate battery replacement for your devices.

The battery might present a fire, explosion, chemical burn, or other hazard if mistreated. Do not put the battery in contact with liquids. Do not heat the battery above 100°C (212°F). Heating the battery above 100°C (212°F) could cause the battery to catch fire or explode.

Antennas


Use only the supplied integrated antennas. Unauthorized antenna modifications or attachments could damage the device and might violate U.S. Federal Communications Commission (FCC) or other regulations.


Repair and maintenance

Do not attempt to modify, disassemble, or service the device. Do not attempt to recharge, or replace, the battery. Only qualified service personnel should perform repairs, or battery replacements, to the device.

Failure to observe all safety instructions contained in the user documentation for the device will void the Limited Warranty and might lead to suspension or denial of services to the offender, legal action, or both.

Device, magnet, and battery disposal

	<p>Do not dispose of the device, magnet, or battery, in household waste bins or in a fire.</p> <p>Please dispose of magnets in accordance with the laws and regulations in your area. All permanent magnets should be thermally demagnetized prior to disposal or placed in a steel container prior to disposal so the magnets do not attract waste disposal equipment or refuse container.</p>
---	---

	<p>The device and battery are recyclable where facilities exist. This symbol is not intended to indicate the use of recycled materials.</p> <p>The Lithium Metal Batteries used in BlackBerry Radar can pose risk of fire, explosion and severe burn hazard if mishandled or damaged. These batteries should never be placed in regular waste and must be recycled through appropriate e-waste or battery recycling channels. Ensure you dispose of your BlackBerry Radar device and its battery in accordance with the laws and regulations in your area. If you have an existing waste management partner, please consult with them regarding disposal, or visit BlackBerry.com/RadarSupport for more information.</p> <p>Only use BlackBerry battery BAT-63705-001 or BAT-63705-002 in the BlackBerry Radar H2M IS Device. Refer to the BlackBerry Radar Battery Information Sheet for details on dimensions, weight, and Lithium content per battery. Safety Data Sheets can be provided upon request.</p>
---	--

Compliance information

Exposure to radio frequency signals

The device radio is a low-power radio transmitter and receiver. It is designed to comply with Federal Communications Commission (FCC) and Innovation, Science and Economic Development Canada (ISED), and The Council of the European Union guidelines and limits, as well as other relevant international guidelines regarding safety levels of radio frequency exposure for wireless devices. These guidelines were developed by independent scientific experts, governments, and organizations including the Institute of Electrical and Electronics Engineers Standard (IEEE), National Council on Radiation Protection and Measurements (NCRP), and International Commission on Non-Ionizing Radiation Protection (ICNIRP).

FCC compliance statement (United States)

This device complies with Part 15 of the Federal Communications Commission (FCC) Rules under FCC ID: L6AITH100-1. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This

equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Innovation, Science and Economic Development Canada certification

This device complies with Innovation, Science and Economic Development Canada (ISED) license-exempt RSS standard(s). Operation is subject to the following conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This device complies with ISED RSS 130, RSS 132, RSS 133, RSS 139 and RSS-GEN under Certification Number 2503A-ITH1001.

Le présent appareil est conforme aux Innovation, Sciences et Développement économique Canada (ISED) applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

L'appareil est conforme aux normes ISED RSS 130, RSS 132, RSS 133, RSS 139 et RSS-GEN sous le numéro d'agrément 2503A-ITH1001.

Radiation exposure statement:

This equipment complies with FCC + ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with greater than 23 cm between the radiator and your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements FCC + ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé à plus de 23 cm entre le radiateur et votre corps.

Class B compliance

This device complies with the Class B limits for radio noise emissions as set out in the interference-causing equipment standard entitled “Information Technology Equipment (ITE)--Limits and methods of measurement,” ICES-003 of Innovation, Science and Economic Development Canada.

EU + UKCA regulatory conformance

Hereby, BlackBerry declares that the radio equipment, BlackBerry Radar H2M IS ITH100-1 is in compliance with: Directive 2014/53/EU and UK Radio Equipment Regulations 2017 SI 2017/1206.

The full text of the EU + UKCA declarations of conformity is available at the following internet address: docs.radar.blackberry.com/guides/user_guide_conformity.

Additional regulatory conformance

Specific details about compliance to the standards and regulatory bodies for the device may be obtained from BlackBerry.

3 Get ready for installation

To complete the installation of your module, you will require a smartphone with internet access to download the BlackBerry Radar Installation App. This app will allow you to record the pairing of each BlackBerry Radar H2M IS module to its asset (that is, the chassis that the device will be installed on) and its associated BlackBerry Radar accessories.



For detailed instructions on the BlackBerry Radar Installation App, log in to the BlackBerry Radar Dashboard and access “Documentation” from the main menu.

If you are unable to utilize the BlackBerry Radar Installation App during your installation, you need to obtain a worksheet where you can record the pairing of each BlackBerry Radar H2M IS module to its asset and associated BlackBerry Radar accessory devices.

For your convenience, you may quickly create a record of the module and asset identifier pairings by removing the partially attached label from the inner housing of the module and placing it on the installation worksheet, next to the asset that will be tracked by the module.



4 Installing BlackBerry Radar H2M IS modules


You may have a large number of BlackBerry Radar H2M IS modules to install. Follow the instructions in this section to:

- Match each module identifier to its asset identifier
- Install the module to the asset you wish to track.

4.1 Prepare to install









To complete the installation of the module to your assets, you will need the following components. The following components are contained in the module packaging.

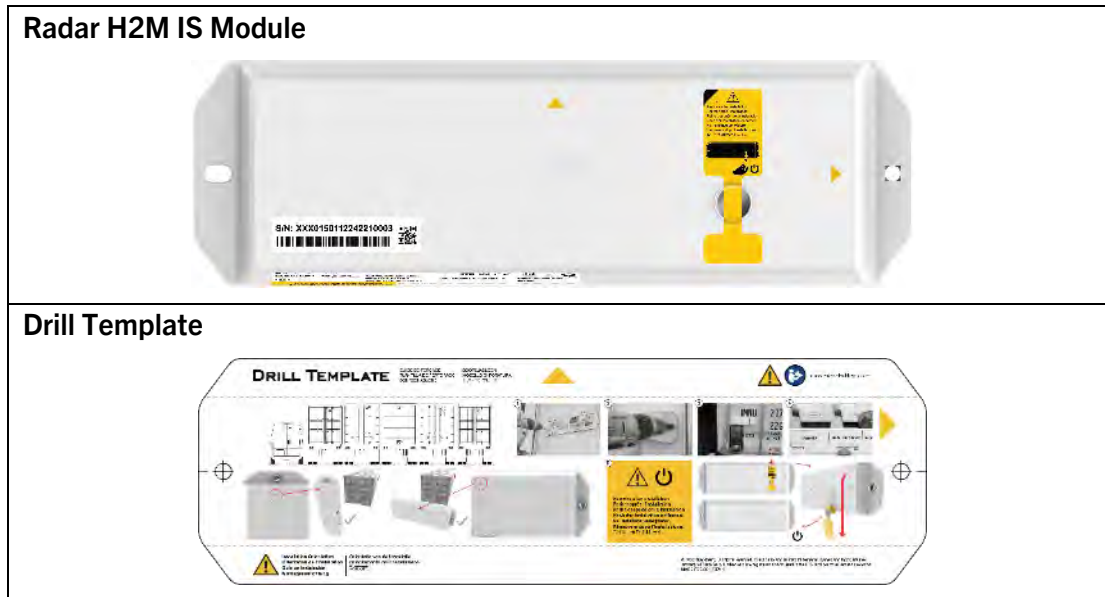Radar H2M IS Module Package Contents



If you are missing any of the above components in your package, contact your BlackBerry Sales Representative.

To attach the module to the asset you wish to track, you must supply your own fasteners. Depending on the construction of your mounting location, you may wish to use the following types of fasteners. **NOTE:** Your choice of fastener will influence the size of the tools required to create the mounting holes (i.e. drill bits) and install or remove the fasteners (i.e. wrenches/sockets/drivers). Also, the actual length of the fasteners will be determined by the thickness of your mounting surface. An example of these points is provided, below.

<p>IMPORTANT: The maximum fastener thread diameter supported by this product is 1/4" or M6 (6 mm). For most secure fastening, we do not recommend using fasteners with a thread diameter less than 1/4" or M6.</p>		
<p>Box Section (+3mm wall thickness)</p> 	<p>A) 2 Thread Rolling Screws (3/8" head, 1/4"-20 thread, 3/4" length)</p>  <p>B) 2 Self-Tapping Screws and Washers (3/8" head, 1/4"-14 thread, 1-1/4" length)</p>  <p><small>*For installation in narrow clearance areas, blunt-ended screws--like thread rolling screws--are recommended.</small></p>	<p>Drill Bit</p> <p>A) 7/32" (6mm) B) 3/16" (5mm)</p> <p>Nut Driver/Socket/Wrench</p> <p>3/8" (10mm)</p> 
<p>Panel Section (with rear access)</p> 	<p>2 Hex Bolts, Nuts, and 4 Washers (7/16" head, 1/4"-20 thread, 1/4"-20 nut) (11mm head, M6 thread, 50mm length, M6 nut)</p> 	<p>Drill Bit</p> <p>1/4" (6mm)</p> <p>Nut Driver/Socket/Wrench</p> <p>7/16" (11mm)</p> 

Fastener selection considerations—Thread rolling screws

You may also wish to install your BlackBerry Radar H2M IS on your chassis where you may not have simultaneous access to both sides of your device to securely install the fastener without a partner. To support one-person installation, in this scenario, we recommend using thread rolling screws.



Thread rolling screws create their own threads within the thickness of the asset’s installation surface. These threads allow the device to be secured to the asset, without the use of a secondary fastener, like a lock nut (although some thread rolling screws can be used with some lock nuts, for extra holding opportunity).









As you will need to supply the fasteners, the length of the thread-rolling screw will be determined by the depth of the installation surface and the depth of the Radar H2M Mounting flange. The drill bit diameter will also be determined by the thread diameter of the selected fastener. **REMEMBER:** the diameter of the hole drilled into the installation surfaces must be 10-20% smaller than the fastener’s thread diameter. Below is an example.

IMPORTANT: The maximum fastener thread diameter supported by this product is 1/4" (0.25") or M6 (6 mm). For most secure fastening, we do not recommend using fasteners with a thread diameter less than 1/4" or M6.









<div> <div>Panel Section</div> </div>	<div> <div>2 Thread Rolling Screws</div> <div>(3/8" head, 1/4"-20 thread, 3/4" length)</div> <div>(10 mm head, M6 thread, 19mm length)</div> </div>	<div> <div>Drill Bit</div> <div> 7/32" (6 mm)</div> <div>Nut Driver/Socket/Wrench</div> <div> 3/8" (10mm)</div> </div>
---------------------------------------	---	--

4.2 Installation tools

Required tools to complete the installation:

Smartphone with BlackBerry Radar Installation App 	Drill and Drill Bits 	Tape 
		Pencil or Non-Permanent Marker 
Nut Driver or Socket Wrench with Socket*  <p>*Nut Driver + Drill offers fastest installation. If no Nut Driver is available, a socket wrench and socket may be used as a substitute.</p>	Safety Glasses 	Tape Measure 
		Wrench  <p>*Required only if nuts and bolts are used.</p>

Recommended tools to complete the installation:

T-Square 	Pocket Level 	Towel 	Hammer and Punch 	
Torque Screwdriver/Adapter with Socket and Bits* (scale range of 0.4 N-m to 4.5 N-m, 4 in-lb. to 40 in-lb.)  <p>*To check compliance with torque specifications for fasteners.</p>	Water  <p>*If cleaning is required.</p>	File 	Cutting Lubricant* (Recommended)  <p>*Recommended for faster drilling speed on thicker metals and longer drill bit life.</p>	


4.3 Matching a module identifier to an asset identifier

In order to track an asset, the Radar H2M IS module that is installed on the asset must be associated with the asset in the BlackBerry Radar Dashboard. It is, therefore, very important to keep a clear record of which Radar H2M IS module is installed on which asset.

The Dashboard application tracks modules and assets using ‘identifiers’. The asset identifier is the name or number of the asset you wish to track. The asset identifiers are entered into the application when you add the assets and will be listed on your installation worksheet. The identifier for each Radar H2M IS module is printed on two labels—one attached to the left end of the outer housing and the other on the bottom end of the outer housing. The module identifier also serves as the serial number (S/N) for the module.

To match a module identifier with an asset identifier:

1. Locate the module identifier for your device. The module identifier is shown in two places.
 1. Front of the outer housing
 2. Bottom end of the outer housing

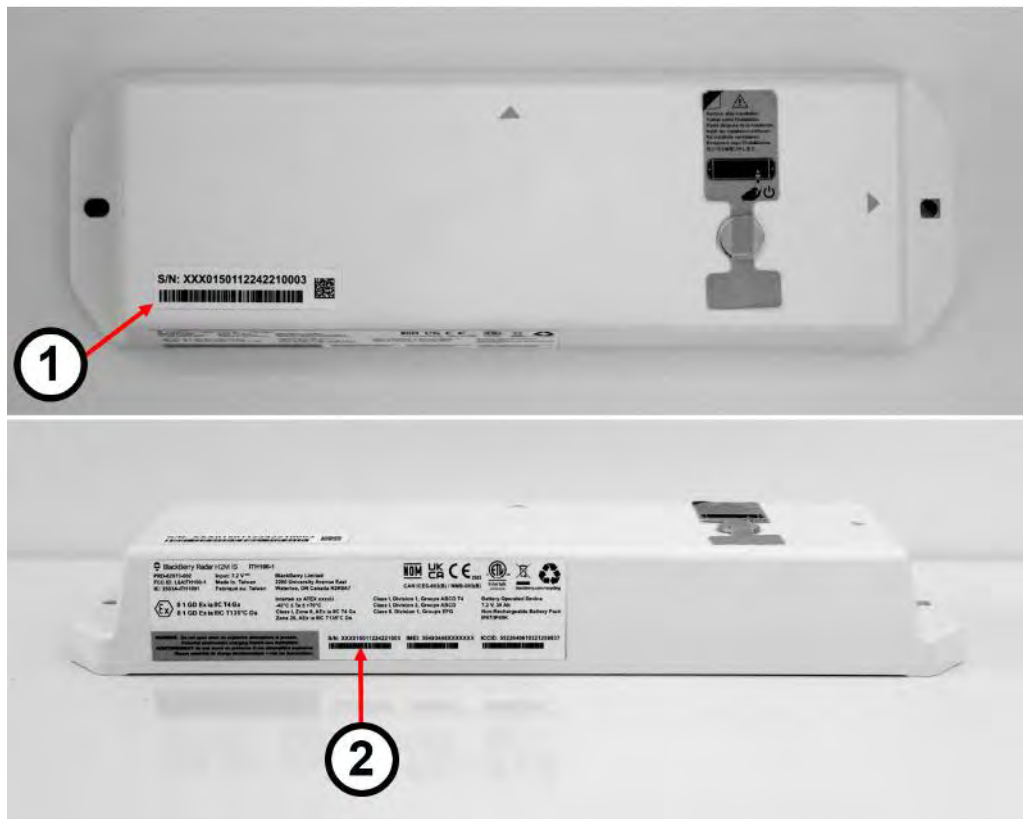

- Once you have installed the module on the asset, create a record of the module-to-asset-to-accessory pairing within the BlackBerry Installation App by recording the asset identifier and scanning the module identifier for the BlackBerry Radar H2M IS device and associated accessories.



- If you are unable to use the BlackBerry Radar Installation App during your installation, you need to obtain a worksheet where you can record the pairing of each BlackBerry Radar H2M IS module to its asset and associated BlackBerry Radar accessories.

For your convenience, you may quickly create a record of the module and asset identifier pairings by removing the partially attached label from the outer housing of the module and placing it on the installation worksheet, next to the asset that will be tracked by the module.



Tip: For modules that have previously been transferred to new assets, the temporary S/N label may no longer be in place. If this is the case, you will need to write the module identifier (S/N) for each module on the installation worksheet.

Asset ID	Module ID Sticker	Accessory
ZG7419	WZ50000108311800001	

The following sections of this guide will illustrate recommended installation methods for various asset scenarios.

4.4 Module installation

WARNING: Do not attempt to install the device when an explosive atmosphere is present.

You may install the module on any flat, vertical or horizontal surface that offers enough mounting area for the module. When selecting a mounting location, carefully consider how the asset will be used during its normal, day-to-day operation.

Do not place the module in a location where it is susceptible to damage from:


- Normal usage activities, such as loading or unloading cargo.
- Moving parts of the asset.
- Road debris.

IMPORTANT: For accurate tracking, orientation matters.

1. For chassis trailer installs, it is recommended to install the device horizontally. This helps the device fit on the trailer crossmembers.
2. When mounting on a vertical surface, always ensure the module is installed with the triangle for your desired orientation, pointing up.
3. Device may be installed facing forward or rear.

NOTE: Installation on the front surface of a trailer or container is not recommended. Vibration from the tractor's engine or trailer mounted refrigeration, heating and generator units may result in false motion alerts.

This diagram illustrates the supported installation orientations for the BlackBerry Radar H2M IS module.

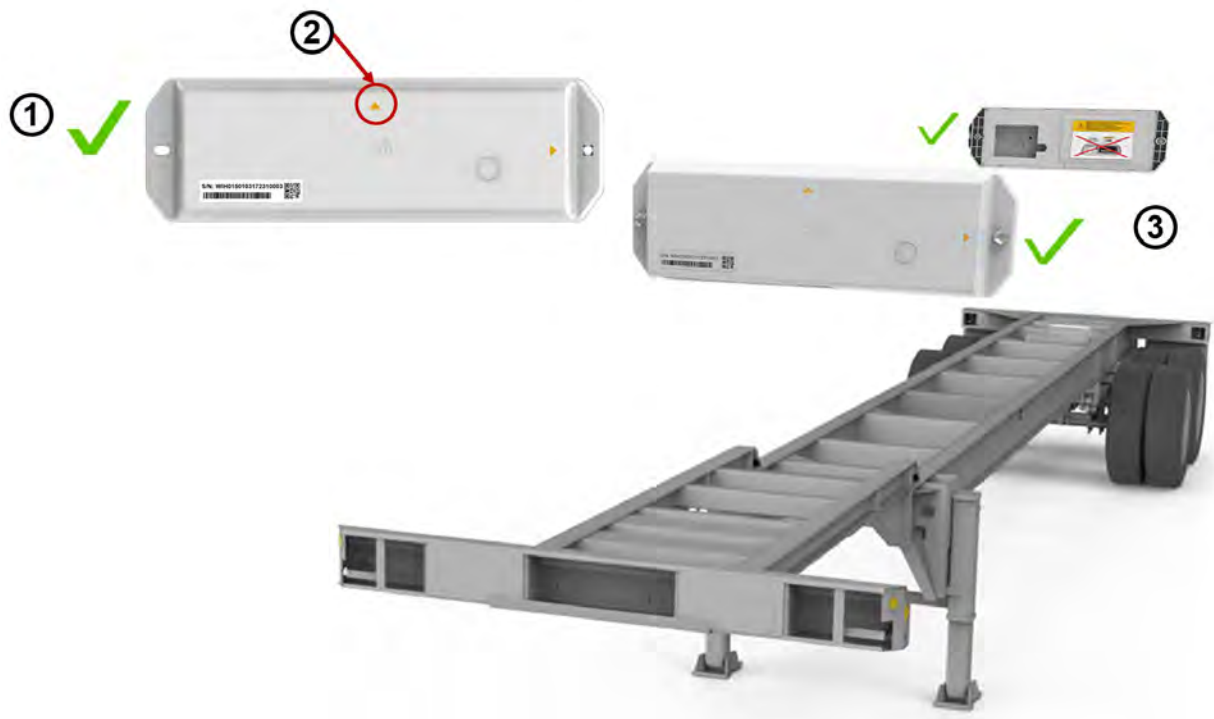

4.4.1 Chassis installation procedure

If you are using BlackBerry Radar H2M IS to track a chassis trailer, you may mount the module on any flat, vertical surface that offers enough mounting area for the module. When selecting a mounting location, carefully consider how the asset will be used in its normal, day-to-day operation.


Do not place the assembly in a location where it is susceptible to damage from:

- Normal usage activities, such as loading or unloading cargo.
- Moving parts of the asset.
- Road debris.

When mounting under a vehicle or piece of equipment, you must exercise a high degree of caution to avoid serious damage to yourself or your equipment:

- Do not install near exhaust sources, ignition sources, or fuel tanks.
- Be careful when installing near pneumatic, hydraulic, and electrical lines to prevent damage to these components during the installation process.

The BlackBerry Radar H2M IS is equipped with a Container Detection feature. This feature can monitor the presence or absence of a container on the chassis. If you wish to take advantage of this feature, you will need to install the module at the rear of the chassis—preferably—as close to the rear axle, as possible.

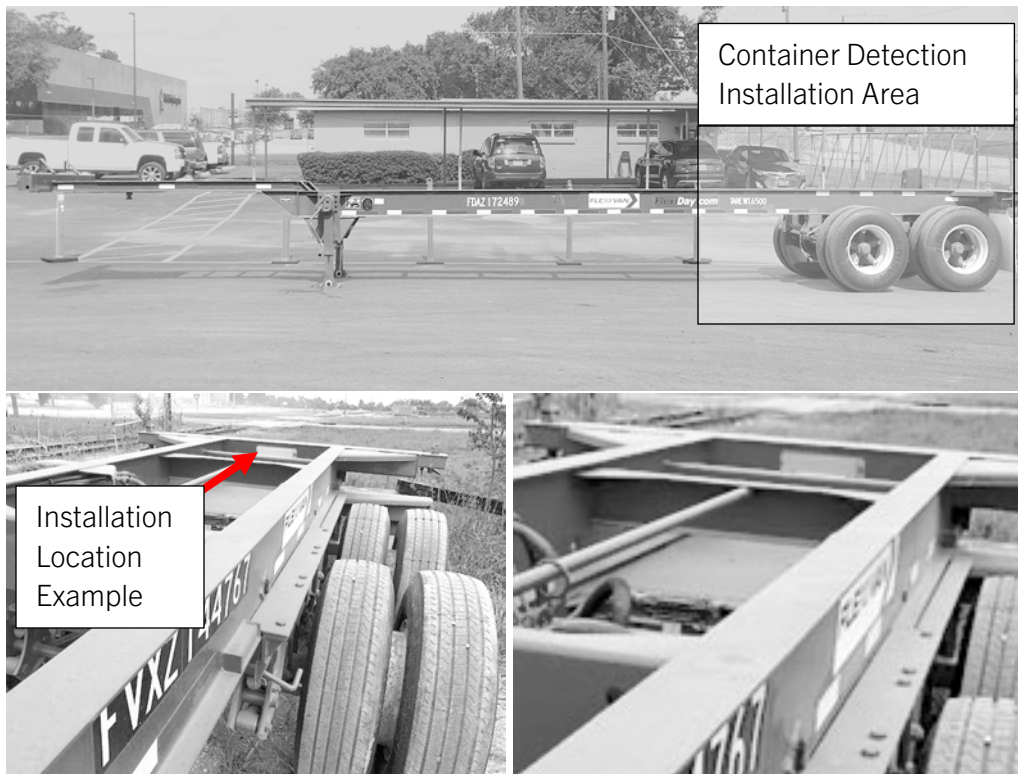


When looking for an installation location on the chassis, if you are considering installation on a frame rail within an overhang, it is recommended to choose an installation location with a minimum clearance of 1/4" (6 mm) above and below the module. Maintaining this minimum clearance improves antenna performance. In some cases, as when installing on narrow width "C-channel" frame rails, it may be beneficial to mount the module on the opposite side of the frame rail to achieve the recommended clearance.



1. Remove the module from the package and from the plastic bag.




2. After selecting the best installation location for your device, remove the liner from the rear of the template and place the template in the desired installation location. The adhesive at the back of the template ensures that it stays on the installation surface for accurate drilling of your holes.

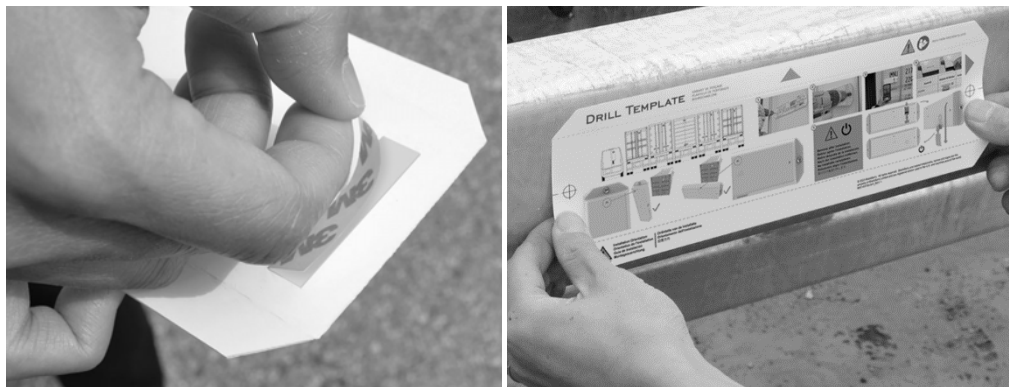

IMPORTANT: When mounting under a vehicle, or a piece of equipment, you must exercise a high degree of caution to avoid serious damage to yourself, the module, or your equipment:

- Do not install near exhaust sources, ignition sources, or fuel tanks.
- Use caution when installing near pneumatic, hydraulic, and electrical lines to avoid damage to these systems during installation.

3. Using a drill bit, drill a hole through each of the cross hairs on the template. This will create two holes you will use to mount the module.

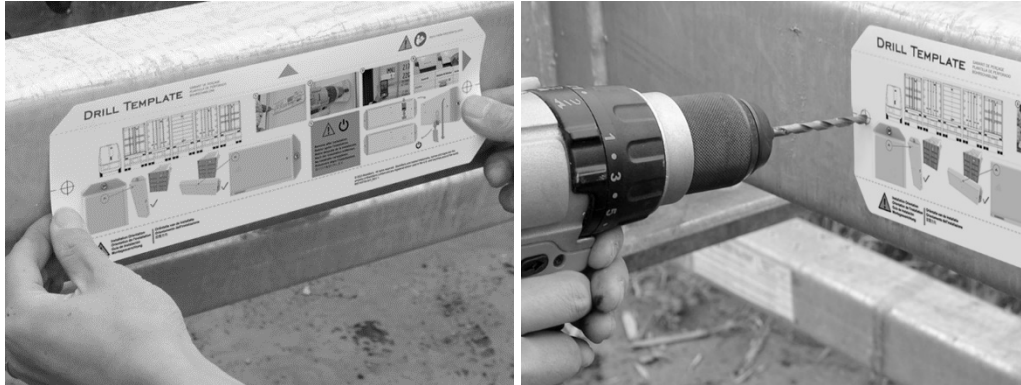

Drilling tips for chassis and frame installations

Due to the thicker, harder steel used on chassis and trailer frames, you may wish to follow these suggestions.

Tip 1: To shorten drilling time and prolong the life of your drill bit, you may wish to use cutting tool lubricant during the drilling process.


Tip 2: For most precise hole drilling, before drilling your hole, you may wish to use a punch and hammer to help place the drill bit. This will prevent the bit from “walking” during the drilling operation.



4. Remove the template. If there are any burrs around the holes, remove them. Also, remove any dust or debris left over from the drilling or de-burring operations.



5. Place the module on the chassis, aligning the holes on the module with the holes you drilled into the chassis. Ensure the arrow on the top of the housing is pointing to the sky.

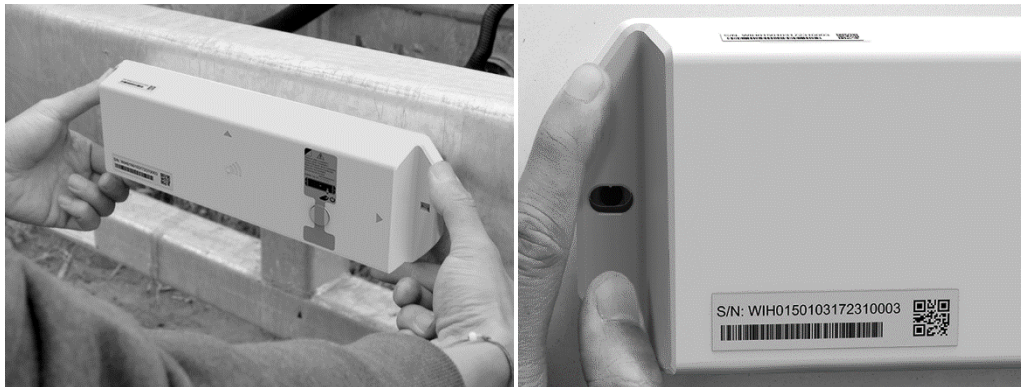


Horizontal Orientation

6. Insert your fastener of choice into the holes and use the appropriate tools to secure the module to the asset. Do not tighten fastener beyond 35 in-lb. (4 N-m).



Tip: if you choose to use a self-drilling screw on an installation surface whose construction leaves the sharp point of the screw exposed, you may wish to remove the pointed end of the screw after the module is mounted to the chassis. This can prevent possible injury, or damage, from the exposed screw ends.

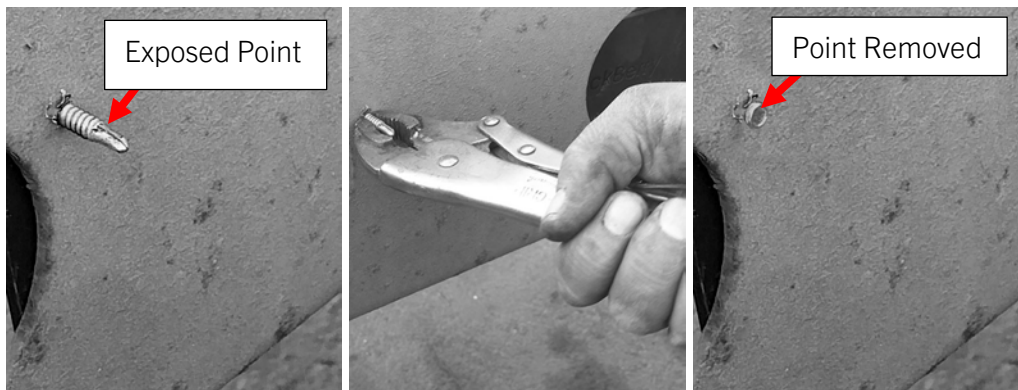

7. Once you have installed the module on the asset, create a record of the module-to-asset-to-accessory pairing within the BlackBerry Radar Installation App by recording the asset identifier and scanning the module identifier for the BlackBerry Radar H2M device and associated accessories with the smartphone.



If you are unable to use the BlackBerry Radar Installation App during your installation, you need to obtain a worksheet where you can record the pairing of each BlackBerry Radar H2M IS module to its asset and associated BlackBerry Radar accessories.

For your convenience, you may quickly create a record of the module and asset identifier pairings by removing the partially attached label from the outer housing of the module and placing it on the installation worksheet, next to the asset that will be tracked by the module.



8. Activate your modules, using the following process.
 - A. On the module, locate a corner of the magnet tape and lift.



- B. Continue to lift the magnet tape and fully remove the magnet tape from the module. Lifting the magnet tape will remove the magnet from the magnet ring.

IMPORTANT: The magnet functions as the “Power” switch for the module. The magnet must be completely removed from the module for the module to operate.



IMPORTANT NOTES ON MAGNET USE

Save and Reuse your Magnets: Once the magnet is removed from the module, we recommend saving some magnets, at your service facility. Maintaining an adequate supply of these magnets can assist in the long-term operation of your device, as the magnets will be required to facilitate module resets or to shut down the device for shipping previously active Radar H2M modules between locations.

For a full explanation of the module reset procedure, please refer to **Section 4.4.2: Power Cycling your BlackBerry Radar H2M IS modules**. For a full explanation of the module Shipping Procedure, please refer to **Section 6.3: Preparing your BlackBerry Radar H2M IS modules for Shipping**.

9. Installation is complete.




4.4.2 Power Cycling BlackBerry Radar H2M IS modules

Use this procedure if you need to “power-cycle” your BlackBerry Radar H2M IS module.


IMPORTANT: This procedure only works on modules where the Magnet Power Control feature has been disabled in the BlackBerry Radar Dashboard.

Before attempting to power cycle your module, please consult the BlackBerry Radar Dashboard to ensure the Magnet Power Control feature is disabled for the modules you are attempting to power cycle.

1. Locate one of the magnets you removed during the installation/activation of the BlackBerry Radar H2M IS module.

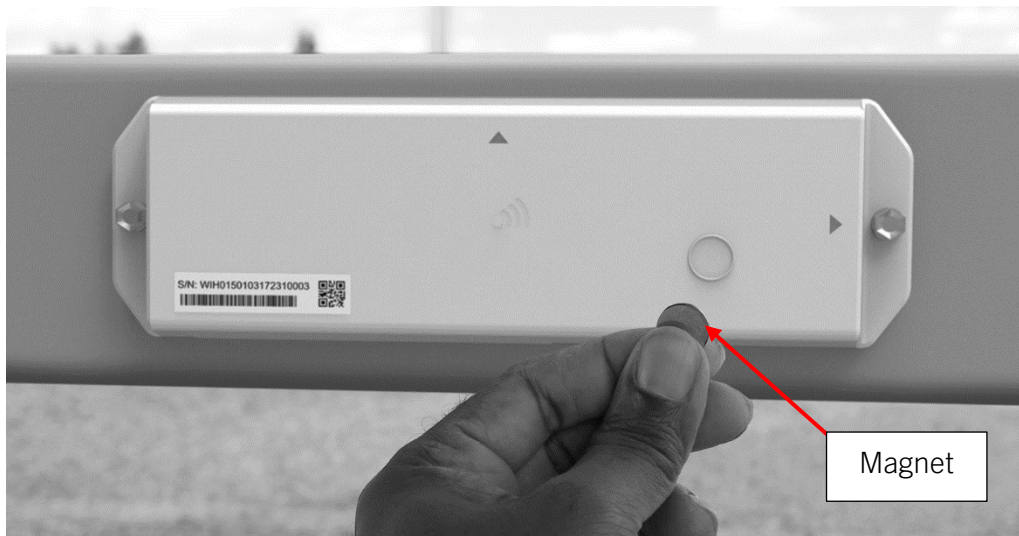

2. Place the magnet within the magnet ring on the front of the housing. Hold the magnet within the magnet ring for at least 5 seconds, then remove the magnet from the module. The module will reboot and reconnect to the cellular network within 5 minutes.

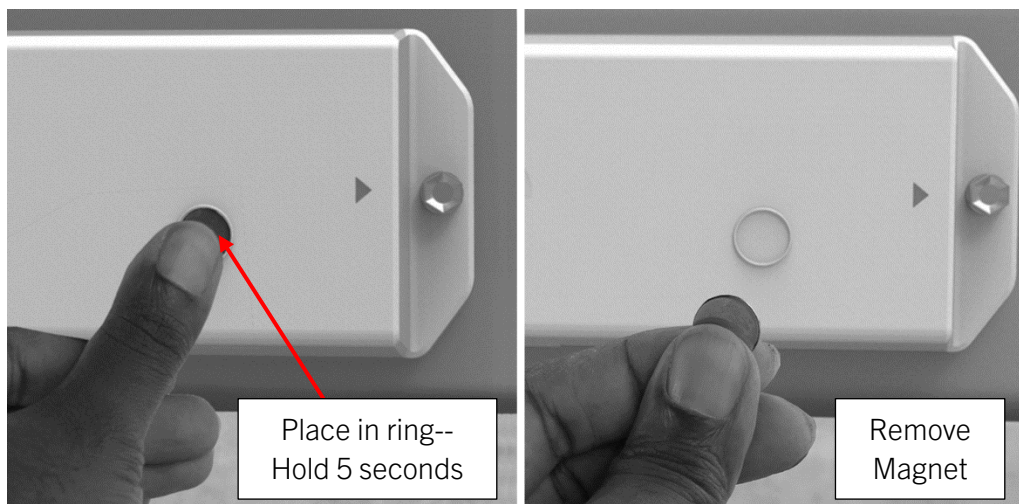

5 Cleaning BlackBerry Radar H2M IS modules

WARNING: Exposure to some solvents may degrade the sealing properties of materials used in the device. Avoid exposing your device to these solvents.

1. For best performance, regularly clean the housing on every service interval of your asset. The cleaning of this module can be performed inside and outside of a Hazardous area using a cloth, dampened with water, to avoid any Electrostatic Discharge risk.



6 Removing BlackBerry Radar H2M IS modules

Use this procedure if you need to remove your BlackBerry Radar H2M IS module from your asset.

For more information on obtaining service for your devices, or recycling and safe disposal of your devices and batteries, contact your BlackBerry representative, or visit the following:






blackberry.com/RadarSupport--for information on service and the recycling and safe disposal of your device and battery.

Note: If you plan to ship your Radar H2M IS module, please be aware that the module, is considered Fully Regulated Class 9 Dangerous Goods in all modes of transportation (Air, Ocean, and Ground) and must only be shipped in special UN certified Dangerous Goods packaging. If you are returning the module to BlackBerry, you may request this UN-certified packaging from BlackBerry.

Also, any person who handles, offers for transport, or transports Dangerous Goods must be adequately trained and hold a training certificate; or perform those activities in the presence and under the direct supervision of a person who is adequately trained and who holds a training certificate.


Products that are considered Dangerous Goods can only move on carrier accounts that are approved for Dangerous Goods and are subject to Dangerous Goods surcharges. The Radar H2M IS module, when shipped without the battery, are not subject to these surcharges.

6.1 Removal tools
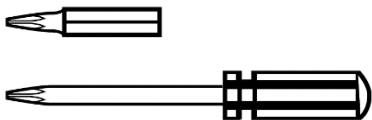
<p>Screwdriver or Bit</p> 	<p>Drill</p> 	<p>Wrench</p>  <p>*Required only if nuts and bolts are used.</p>
<p>Nut Driver or Socket Wrench with Socket*</p>  <p>*Nut Driver + Drill offers fastest removal. If Nut Driver is unavailable, a socket wrench and socket may be used.</p>	<p>Safety Glasses</p> 	

6.2 Module removal

1. Remove the module from the asset by removing the two fasteners from the ends of the module and remove the module.

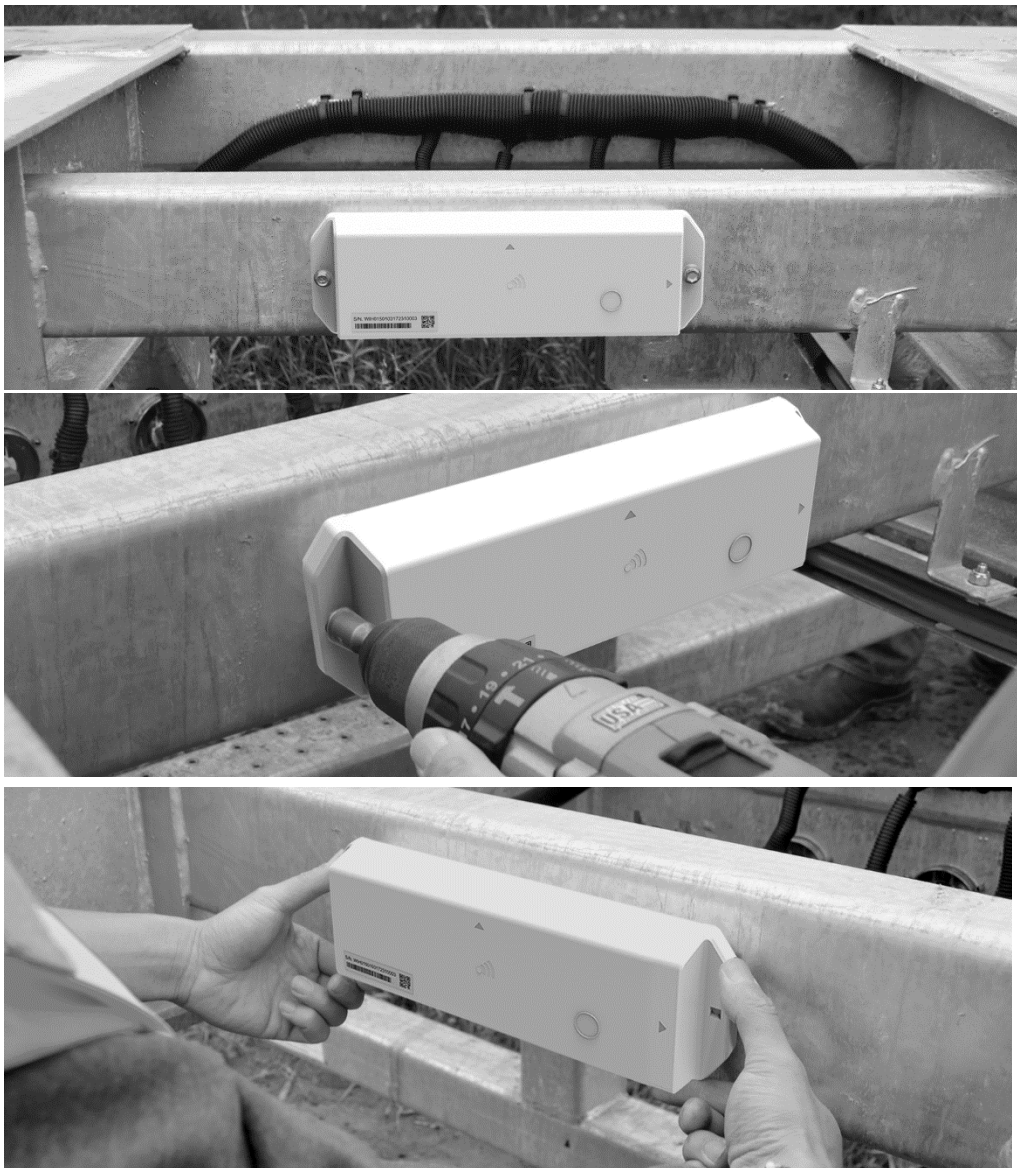

6.3 Shipment prep


If you do need to ship BlackBerry Radar H2M IS, please follow this procedure.

IMPORTANT: To transport, or ship your module, the module must be powered off. By default, the magnet functions as the “Power” switch for the module.


The magnet’s ability to control the power may be disabled by enabling the Magnet Power Control feature in the BlackBerry Radar Dashboard. To ensure the magnet will power off the module—the Magnet Power Control feature must be disabled.

Before attempting to transport, or ship, your modules--please consult the BlackBerry Radar Dashboard to ensure the Magnet Power Control feature is disabled on the modules you are attempting to ship.

1. Locate the magnet that shipped with your device, and place within the magnet ring on the front of your product.

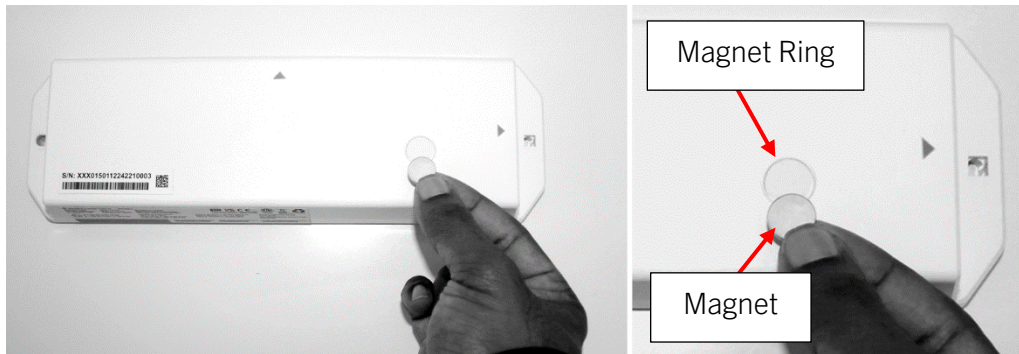

2. Apply a piece of strong tape to keep the magnet in place during transit. If you plan to do any shipping of your device, you may request a sheet of Magnet Tape from your BlackBerry representative.

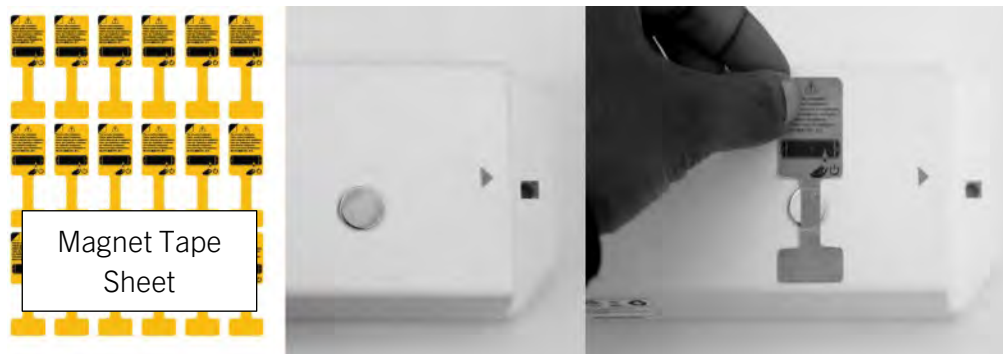

IMPORTANT: Never ship the module without the magnet in place. The magnet is necessary to keep the module powered off during transit.

3. Module is now ready for placement into the UN certified Dangerous Goods packaging.



7 Support

If you run into any problem during the installation process, contact the BlackBerry Radar support team at 1-844-RADAR-BB.

Legal notice

©2023 BlackBerry. All rights reserved. BlackBerry® and related trademarks, names, and logos are the property of BlackBerry Limited and are registered and/or used in the U.S. and countries around the world. All other trademarks are the property of their respective owners. This documentation, including any references to third-party sources of information, hardware or software, products or services ("Third Party Products and Service"), is provided or made accessible "AS IS" and "AS AVAILABLE" and without condition, endorsement, guarantee, representation, or warranty of any kind by BlackBerry Limited and its affiliated companies ("BlackBerry"). BlackBerry assumes no responsibility for any typographical, technical, or other inaccuracies, errors, or omissions in this documentation and reserves the right to periodically change information that is contained in this documentation.

The terms of use of this documentation and any BlackBerry product or service are set out in a separate license or other agreement with BlackBerry applicable thereto. Certain features outlined in this documentation may require Third Party Products and Services and your use of Third Party Products and Services shall be governed by and subject to you agreeing to the terms of separate agreements applicable thereto with third parties.

BlackBerry Limited
2200 University Avenue East
Waterloo, Ontario
Canada N2K 0A7

Published in Canada